SECURITY DOOR PERSPECTIVE



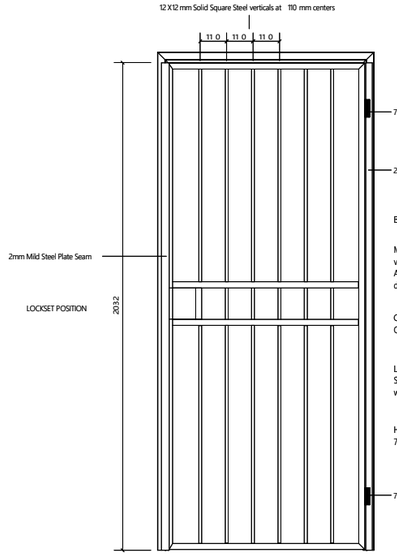

SECURITY D OOR ELEVATION

BURGLAR PROOFING TO EXTERNAL DOORS

Mild Steel Square hollow section frame (25mmx25mmx2mm with solid square mild steel verticals) 12 mmx12 mm at 1,200mm centers, and with MS plate seam lock rail (16 mm) at 1 m AFFL welded between Mild Steel square hollow section frames (25x25x2mm) as indicated on detail drawing. The gate shall be primed red oxide and painted with gloss enamel paint

COLOUR
Off White

LOCK FURNITURE
Solid narrow style double cylinder lock with draw back latch with G 191 Brushed stainless steel with galvanized steel case including standard solid door handle

HINDGES
70mm/ Weld 20 Bullet Hindges welded in position as shown on detail drawing

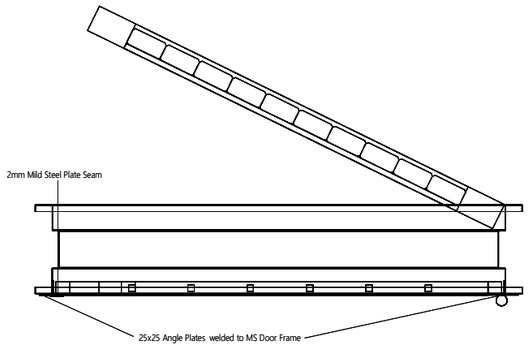

SECURITY DOOR PLAN

NATIONAL HOUSING ENTERPRISE
7 Omuramba Road, Eros P. O.Box 20192 , Windhoek
Telephone (061) 292701 Fax (061) 292 7270

Project: NHE OKAKARARA HOUSING DEVELOPMENT				
Description: SECURITY DOOR DETAILS				
Date: 06,07,2023	Scale: AS SHOWN	Checked: H. BOCK		Drawing number: 743 231 – 114
Drawn: Q. GOSES	Approved: T. DE KLERK	No	Date	

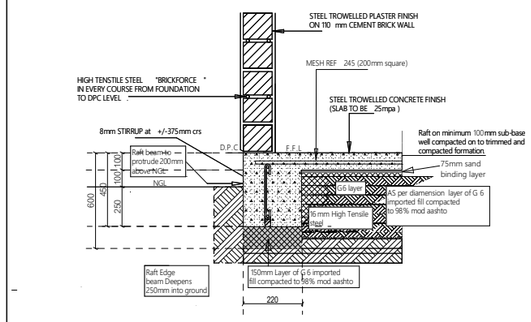

EXTERNAL FOUNDATION

NATIONAL HOUSING ENTERPRISE
7 Omuramba Road, Eros P. O.Box 20192 , Windhoek
Telephone (061) 292701 Fax (061) 292 7270

Project: NHE OKAKARARA HOUSING DEVELOPMENT				
Description: EXTERNAL FOUNDATION DETAILS FOR 110 mm WALLS				
Date: 06,07,2023	Scale: 1 : 20	Checked: H. BOCK		Drawing number: 743 231 – 115
Drawn: Q. GOSES	Approved: T. DE KLERK	No	Date	

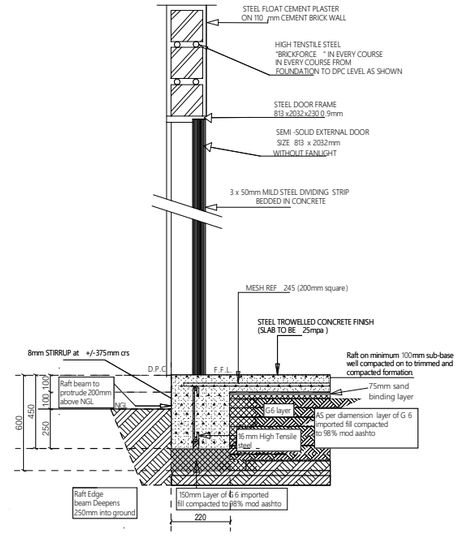

SECTION THROUGH EXTERNAL DOOR OPENING TO INSIDE 110 mm WALLS

NATIONAL HOUSING ENTERPRISE
7 Omuramba Road, Eros P. O.Box 20192 , Windhoek
Telephone (061) 292701 Fax (061) 292 7270

Project: NHE OKAKARARA HOUSING DEVELOPMENT				
Description: SECTION THROUGH EXTERNAL DOOR FOR 110 mm WALLS				
Date: 06,07,2023	Scale: 1 : 20	Checked: H. BOCK		Drawing number: 743 231 – 122
Drawn: Q. GOSES	Approved: T. DE KLERK	No	Date	

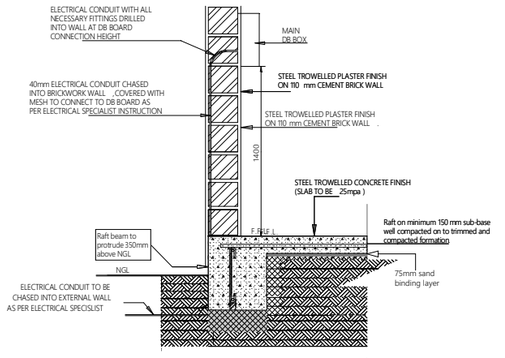

NATIONAL HOUSING ENTERPRISE
7 Omuramba Road, Eros P. O.Box 20192 , Windhoek
Telephone (061) 292701 Fax (061) 292 7270

Project: NHE OKAKARARA HOUSING DEVELOPMENT				
Description: DISTRIBUTION BOX AND ELECTRICAL CONNECTION DETAIL				
Date: 31/01/2024	Scale: 1 : 20	Checked: H. BOCK		Drawing number: 743 231 – 117
Drawn: A.NAIBAB	Approved: H.BOCK	No	Date	

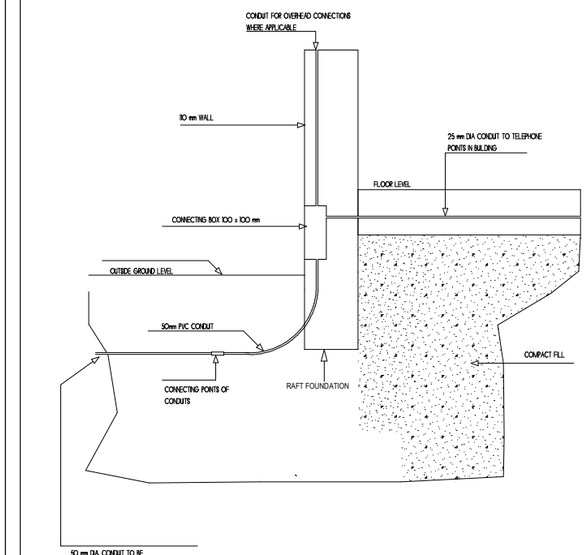

NATIONAL HOUSING ENTERPRISE
7 Omuramba Road, Eros P. O.Box 20192 , Windhoek
Telephone (061) 292701 Fax (061) 292 7270

Project: NHE OKAKARARA HOUSING DEVELOPMENT				
Description: TYPICAL TELPHONE CONNECTION DETAIL				
Date: 31/01/2024	Scale: 1 : 20	Checked: H. BOCK		Drawing number: 743 231 – 118
Drawn: A.NAIBAB	Approved: H.BOCK	No	Date	

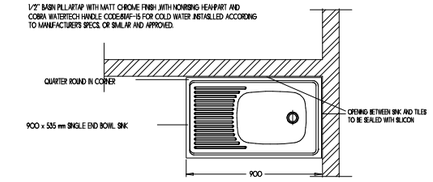

PLAN

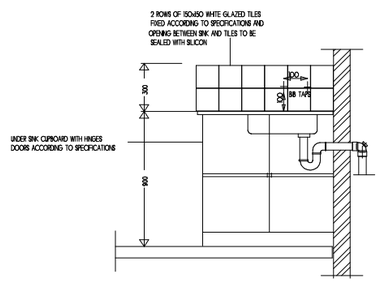

KITCHEN SINK DETAIL - CORE HOUSES
(UNDER SINK CUPBOARD)

NATIONAL HOUSING ENTERPRISE
7 Omuramba Road, Eros P. O.Box 20192 , Windhoek
Telephone (061) 292701 Fax (061) 292 7270

Project: NHE OKAKARARA HOUSING DEVELOPMENT				
Description: KITCHEN SINK DETAIL				
Date: 31/01/2024	Scale: 1 : 20	Checked:		Drawing number: 743 231 – 111
Drawn: A.NAIBAB	Approved: H.BOCK	No	Date	

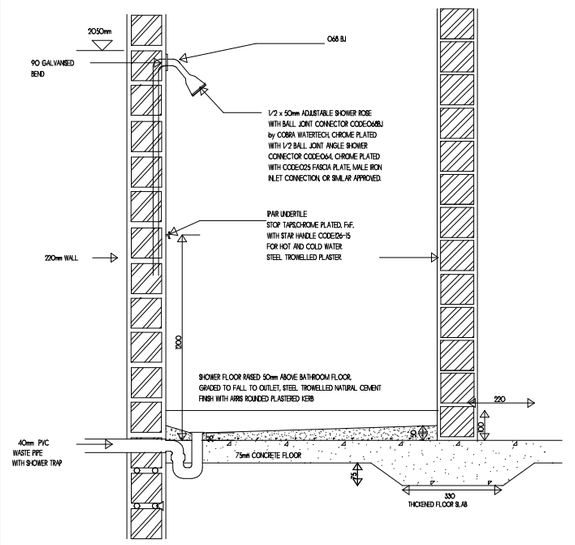

SHOWER DETAIL (110mm EXTERNAL WALLS)

NATIONAL HOUSING ENTERPRISE
7 Omuramba Road, Eros P. O.Box 20192 , Windhoek
Telephone (061) 292701 Fax (061) 292 7270

Project: NHE OKAKARARA HOUSING DEVELOPMENT				
Description: SHOWER DETAILS				
Date: 31/01/2024	Scale: 1 : 20	Checked:		Drawing number: 743 231 – 113
Drawn: A.NAIBAB	Approved: H.BOCK	No	Date	